



Customer approval :

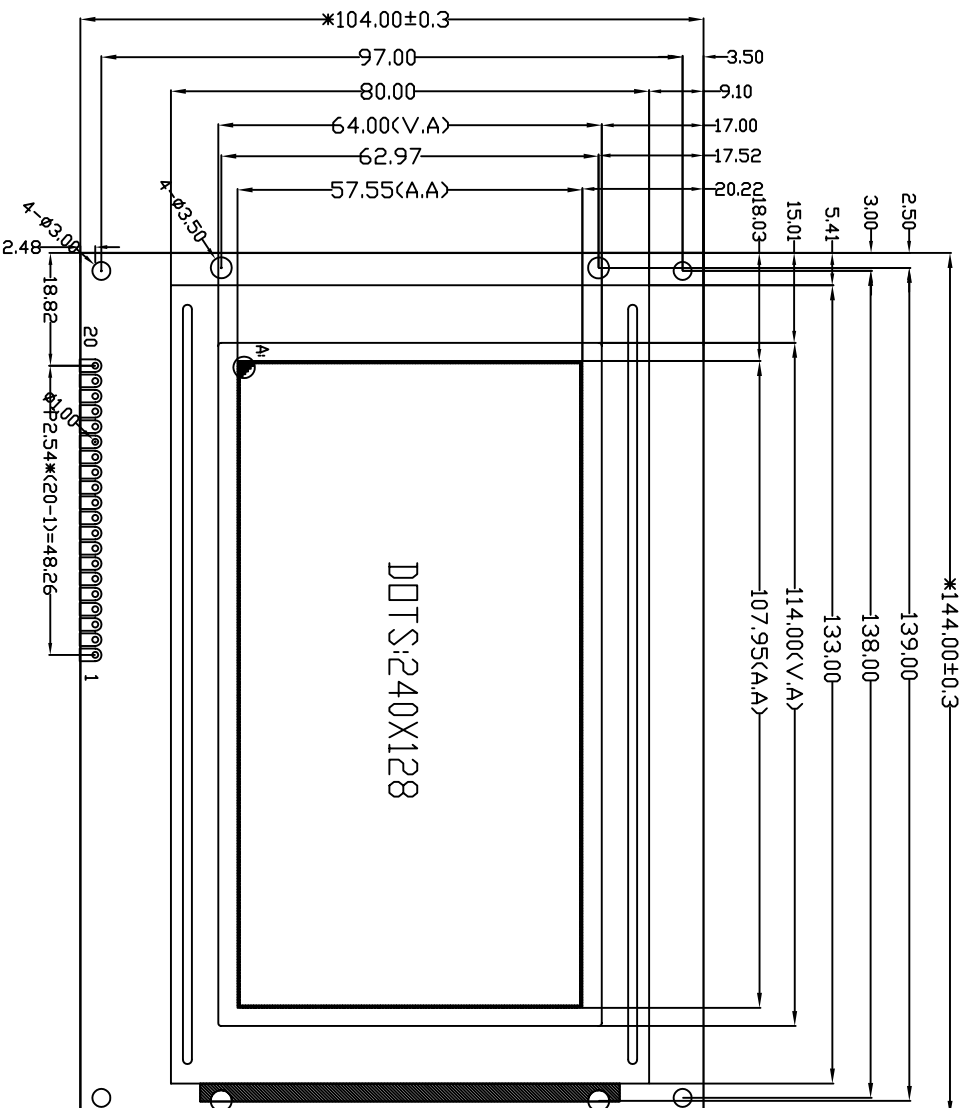

- SPECIFICATION:**
- 1). Driving: DotS:240*128, DUTY:1/128, BIAS:1/12, VDD:5.0V, VOUT: -14.5V, VO: -12.4V
 - 2). Viewing angle: 6 0°(LOOK)
 - 3). Display mode:STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
 - 4). Operating temp: -20°C~+70°C
Storage temp: -30°C~+80°C
 - 5). Controller IC:T6963(Or Compatible)
 - 6). Backlight: White
 - 7). Dimensions with mark "*" are important, with mark "(")" are referenced
 - 8). All the raw materials are RoHS complicant

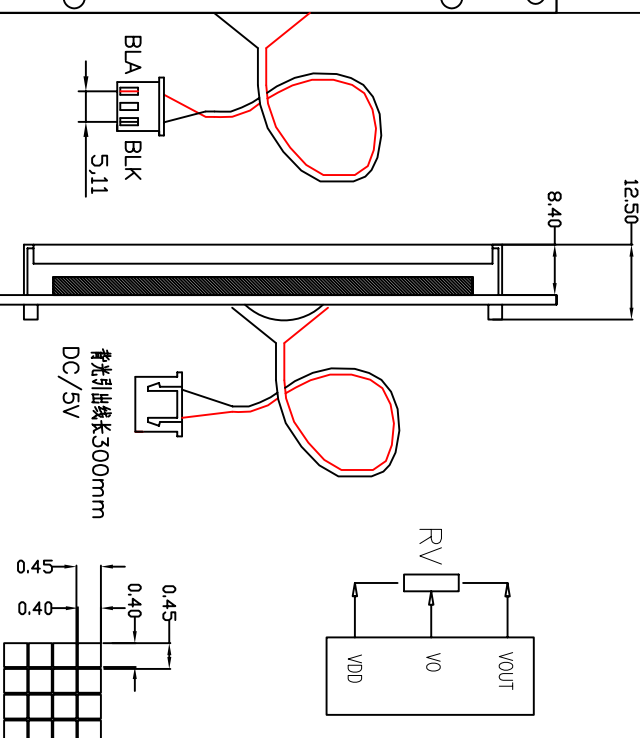

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|-----|-----|----|-----|------|-----|-----|-----|-----|-----|-----|-----|
| CONNECTION | GND | VDD | VO | C/D | RD | WR | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 |
| CONNECTION | DB6 | DB7 | CE | RES | VOUT | MD2 | FS | NC | | | | |

REVISION RECORD

First issue

REV A0



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

DRAWING NO.

SYM240128A4V10-5C3BLNLR8-B5N1

GENERAL TOL:

±0.3

APPROVED BY

CHECKED BY

DRAWING BY

UNIT: mm

LAN

2012/11/10



PAGE 1/1