



Customer approval :

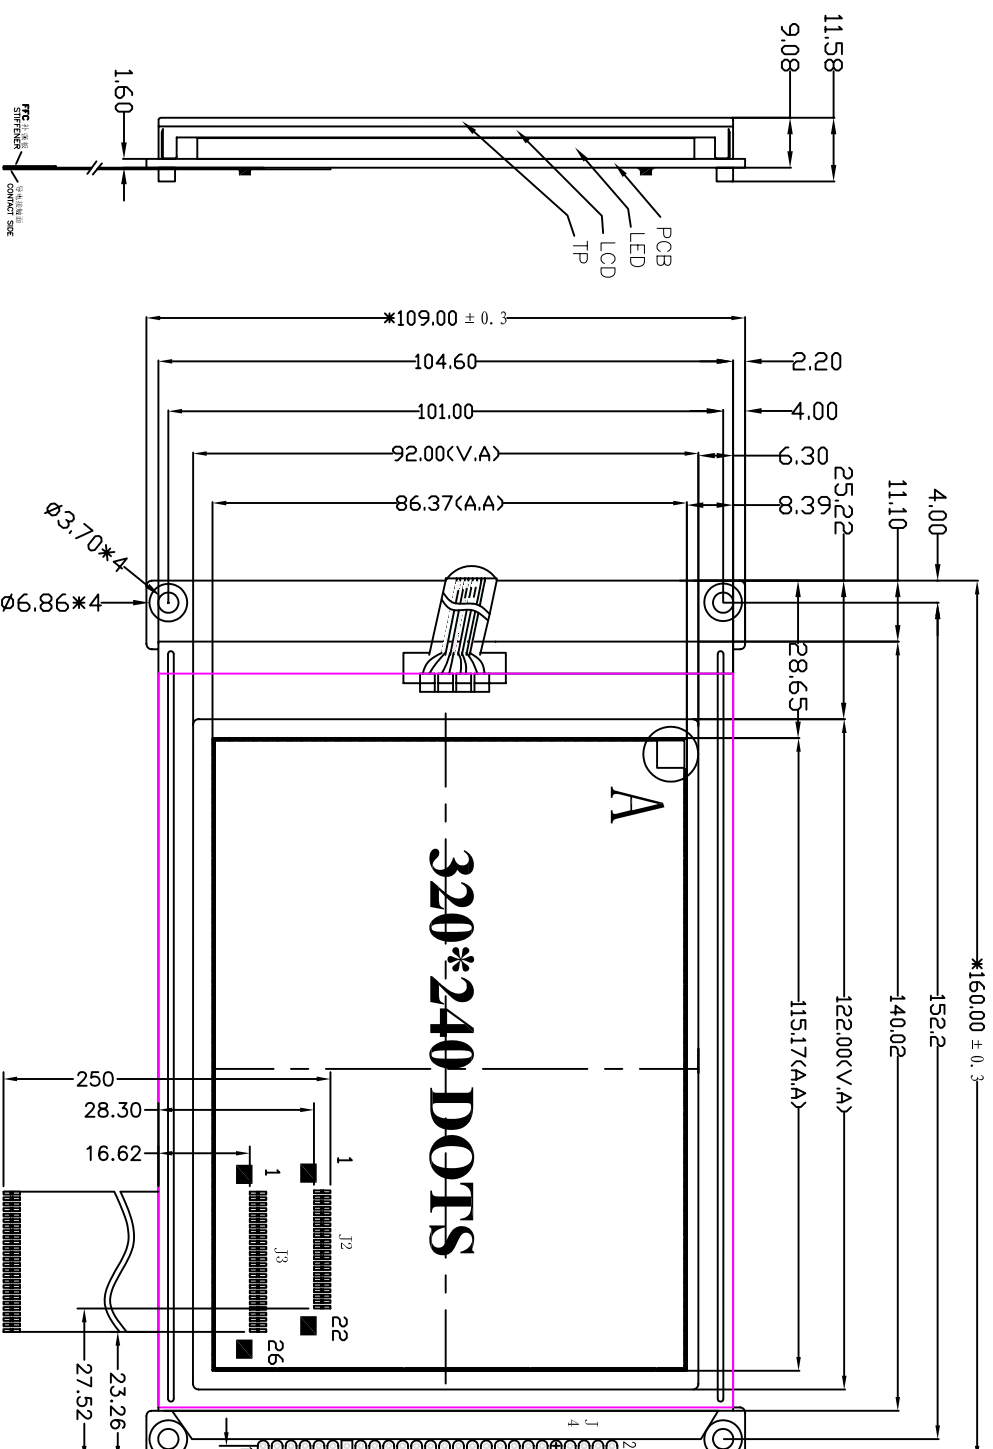



接口, FPC, TP, 背光请选择使用

J1		J2		J3		J4	
PIN	CONNECTION	PIN	CONNECTION	PIN	CONNECTION	PIN	CONNECTION
1	VCC	1	DO	1	GND	1	VCC
2	V0	2	D1	2	VCC	2	V0
3	A0	3	D2	3	DB7	3	CS
4	WR	4	D3	4	VDD	4	VSS
5	RD	5	DSPOFF	5	VOUT	5	RESSET
6	DB0	6	FLM	6	BLA	6	BLA
7	DB1	7	V-COM	7	DC1K	7	DC1K
8	DB2	8	CL1	8	T_CS	8	T_CS
9	DB3	9	VCC	9	DIN	9	DIN
10	DB4	10	GND	10	VOUT	10	PEN
11	DB5	11	GND	11	BUSY	11	BUSY
12	DB6	12	GND	12	IN3	12	IN3
13	DB7	13	GND	13	IN4	13	IN4
14	CS	14	V0	14	IN3	14	IN3
15	VDD	15	V0	15	IN4	15	IN4
16	VSS	16	BLA	16	IN3	16	IN3
17	VOUT	17	DC1K	17	IN4	17	IN4
18	RESSET	18	T_CS	18	IN3	18	IN3
19	BLA	19	DIN	19	IN4	19	IN4
20	DC1K	20	VOUT	20	IN3	20	IN3
21	T_CS	21	PEN	21	IN4	21	IN4
22	DIN	22	BUSY	22	IN3	22	IN3
23	PEN	23	BUSY	23	IN4	23	IN4
24	BUSY	24	IN3	24	IN4	24	IN4
25	IN3	25	IN4	25	IN3	25	IN3
26	IN4	26	IN3	26	IN4	26	IN4

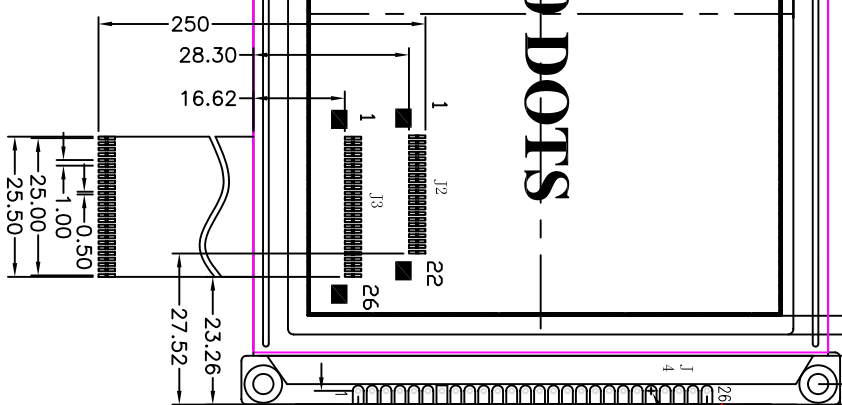

Specification:

- 1). Driving: Duty:1/240, Bias:1/17, VOUT:-21.5V(Ref)V0=-18.5V,VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3) Display mode: FSTN/Or(STN/Negative/Transmissive/Blue)
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -50°C~+80°C
- 5). Controller IC: RA8835AP3N+TSC2046 or ADS7843
- 6). Backlight: White 5V 160ma
- 7). Dimensions with mark "*" are important,
with mark "()" are referenced
- 8). All the raw materials are RoHS compliant




深圳市三元晶科技有限公司
 Shenzhen TCC LCD Hi-Tech Co., Ltd

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	PAGE:	PROTECTION
A0	First issue	11/18	SYM320240B7V12			1 OF 1	三角法
GENERAL TOL: ±0.3							