


Customer approval :

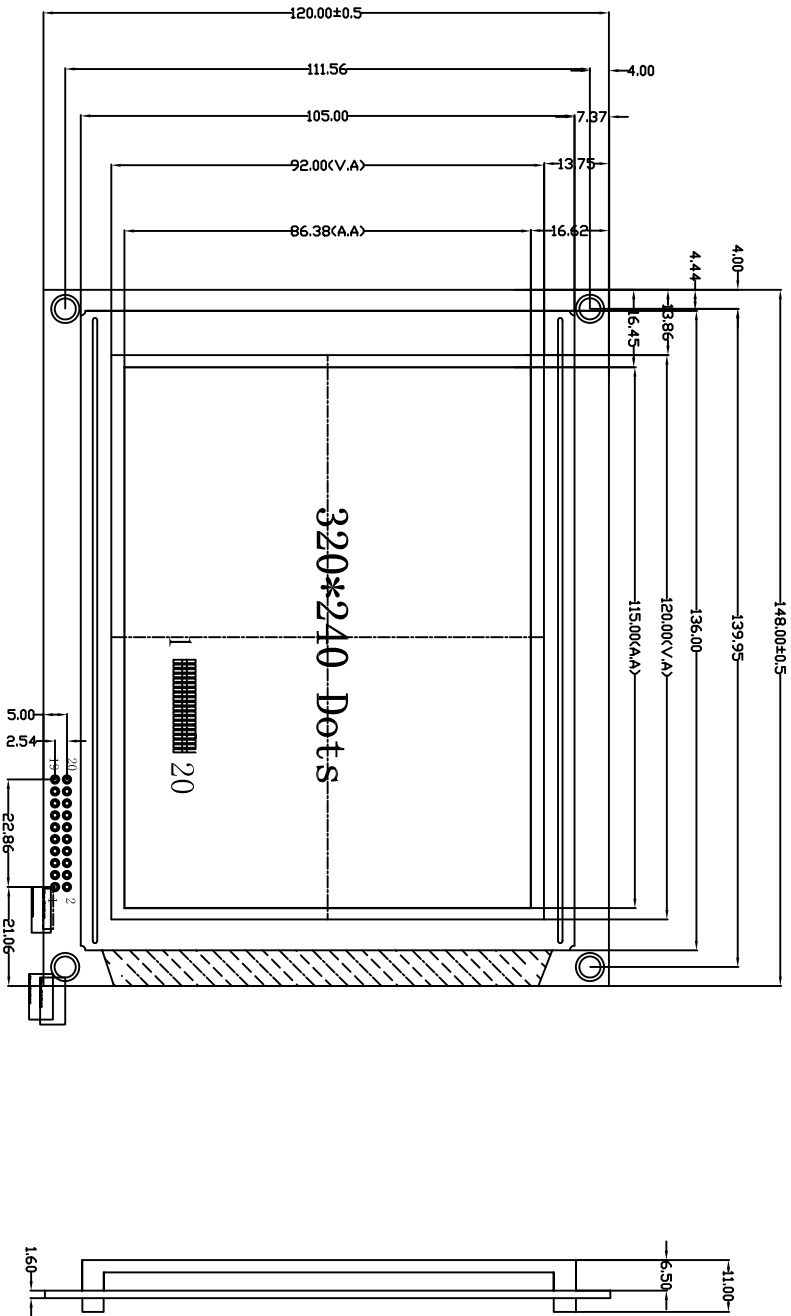

Specification:

- 1). Driving: Duty:1/240, Bias:1/12, VLCD:-21.5(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/BLUE MODE
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: RA8835P3N
- 6). Backlight: Bottom ,Y/G
- 7). Dimensions with mark "*" are important,
with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	VO	R0	WR	A0	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	/CS	/RST	VOUT	F0ND	BLA	BLK

REV	REVISION RECORD	DATE
A0	First Issue	11/18

TCC 深圳市三元晶科技有限公司
Shenzhen TCC LCD Hi-Tech Co., Ltd

MODEL NO. 模组型号	SYM320240V2.1		GENERAL TOL: 公差公差	±0.3
APPROVED BY	CHECKED BY	DRAWING BY	PAGE: 页码 1 OF 1	UNIT: 单位 mm

PROTECTION
三角法

